

# IP39-41x series Single Button Door Access Control

## VoIP & SIP Video

The Nista Devices IP Door Phones are standalone SIP phones, which maximize functionality of the VoIP network. Integrated into SIP Proxy as extension, IP Door Phone allows voice and video communication and door control in multiple company branches, which are operated within single IP network. An integrated IP video camera provides real-time video streaming. Nista IP Door Phone's stylish housing blends well with the modern company designs.



IP39-41AC



IP39-41PC



IP39-41A




IP39-41P

- Designed as SIP proxy extension
- Multiple Doors control
- High Quality Audio
- HD video
- Door Opening from local & remote extensions
- Web-based programming interface
- Piezo and Touch Single button
- Secure wall installation
- Stylish design
- SRTP; Media Encryption

# IP Door Access Control

IP39-41x DOOR PHONE

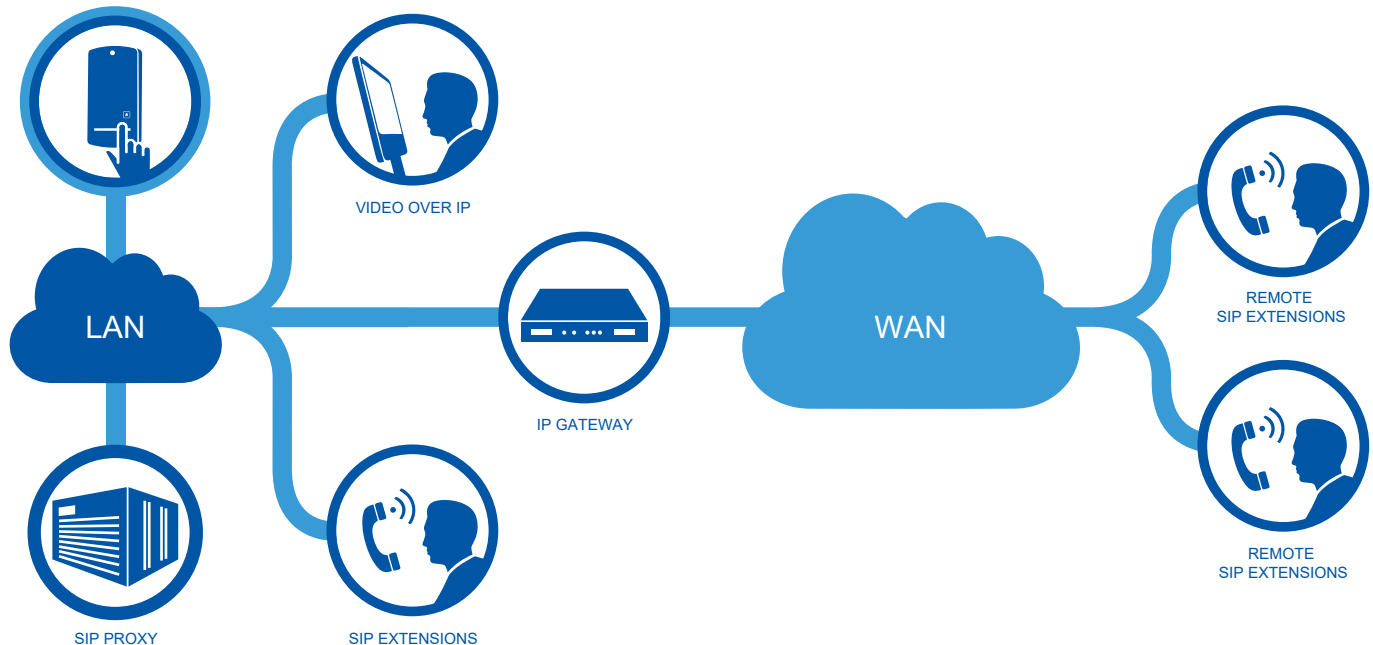

## Main Features

- Door opening from remote extension
- Single Button front panel
- SIP Proxy extension account
- Direct dialing to Day & Night destination
- Remote door opening codes
- Peer-To-Peer calls
- No Answer call forwarding
- 2 separate relays
- External Switch Buttons
- Pure SIP HD Video call support
- Network Configuration: DHCP or Static
- Web interface; HTTPS support
- Web GUI password protection
- Administrator's rights levels
- Firmware upgrade and Backup
- POE-Power over Ethernet
- Auto Provisioning
- Case Opening Alarm

## Technical Specifications

Power supply: 5 VDC 2A or POE

Communication interface: Ethernet RJ-45

Relay switching current: Relays 2A Max

VoIP protocol supported: SIP; RTP; RTCP

Supported Audio codecs:

G.711 PCM ( $\mu$ A-Law); G.722; G.729, Speex 8/16/32 kHz; GSM

Video Codecs: H.264; H.263-1998 (H.263+)

Video Resolution: 640x480; 720p; CIF; QCIF

Wide angle IP video camera

Echo canceller:

G.168-2002 Compliant with programmable echo tail of up to 128 msec.

Echo canceller length: Up to 64 msec; Acoustic EC

Media Encryption: SRTP

NTP protocol support

NAT Traversal and STUN support

Syslog protocol support

Speaker / Microphone Volume Web Control

Adaptive Jitter Buffer (up to 300 msec)

IP media features: Automatic Gain Control

DTMF Presentation modes: RFC2833; SIP Info

Dimensions: 182x95x36 mm

Weight: 0.8 kg

*\* Manufacturer reserves the right to change the product design and functionality.*