

## Product Introduction

This dry contact switch, with its compact design and excellent control capabilities, adds infinite possibilities to your smart home system. Its small size allows for easy integration into various spaces, offering flexible dry contact control for seamless device interconnection and a smarter, more convenient living environment.

## Features




- Compact size for easy installation and concealment
- Provides dry contact control output
- Universal voltage compatibility for broad applications
- Supports Belahome APP and HyPanel control



## Specification

- Product model: TYSH-1CH
- Input voltage: 100 ~ 240VAC, 50/60Hz
- Communication method: ZigBee 3.0
- Load limit: Max 150W (inductive load)  
Max 5A (resistive load)
- Working temperature: -10 ~ 40°C
- Working humidity: 0 ~ 95% RH  
(non-condensing)
- Product dimensions: 43×39.2×22.3mm
- Protection level: IP20

## Wiring Diagram

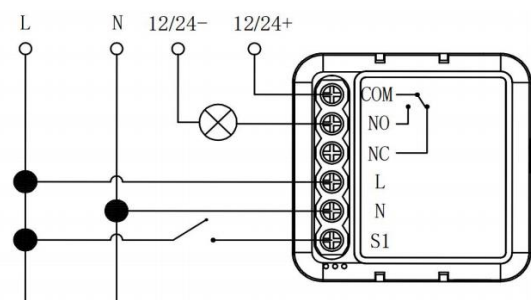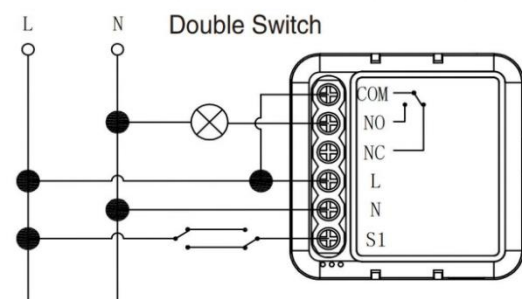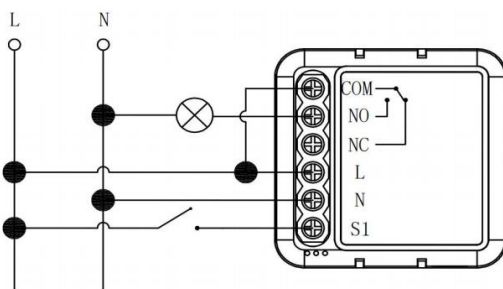

## Networking method

1. Connect the power cord correctly according to the wiring diagram to power the device;
2. Press and hold the reset button for about 10 seconds, the device indicator will flash quickly, indicating that it has entered the network pairing mode;
3. Add to the network through the gateway device.

## Product Dimension Diagram (mm)

