Ruijie SRcycc



RG-EW1200R 1200Mbps Dual-band Mesh Wi-Fi Extender

DATASHEET




Highlights

- Cover your whole home network with one-click
- Unbreakable Wi-Fi signal throughout your Home
- Three-bar signal indicator guides you to find the best spot
- Reyee Mesh brings you unlimited signal connection everywhere you go
- More wireless mode options, more surprise
- Take control of your home network at your fingertips





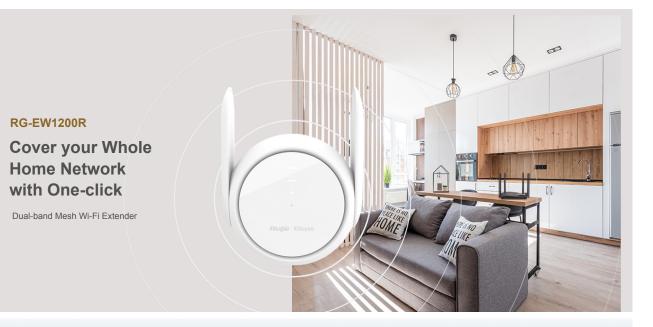

Unbreakable Wi-Fi Signal throughout Your Home

Thanks to the built-in signal amplifiers, EW1200R can penetrate more walls and expand the signal to every single corner of your home.






strong signal •	Three-bar Signal Indicator Guides you to Find the Best Spot
weak signal •	EW1200R clearly shows you the signal strength and guides you the best spot to position the repeater, while others only give you the "Yes or No" answer
Rujie	Reyee

Highlight Features





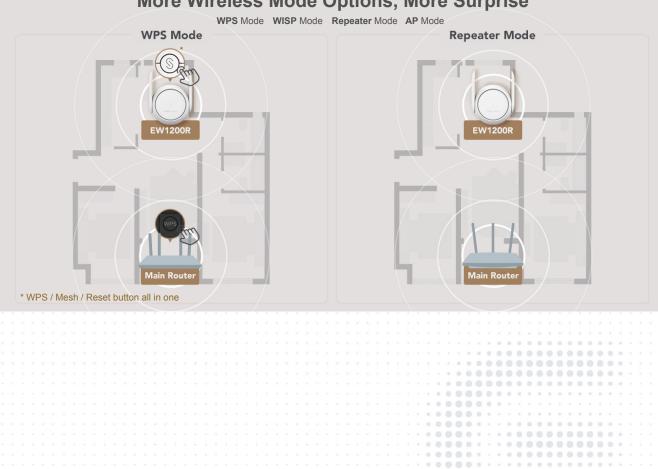

www.partnernet-ict.com · sales@partnernet-ict.com


 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0

......

........

Highlight Features



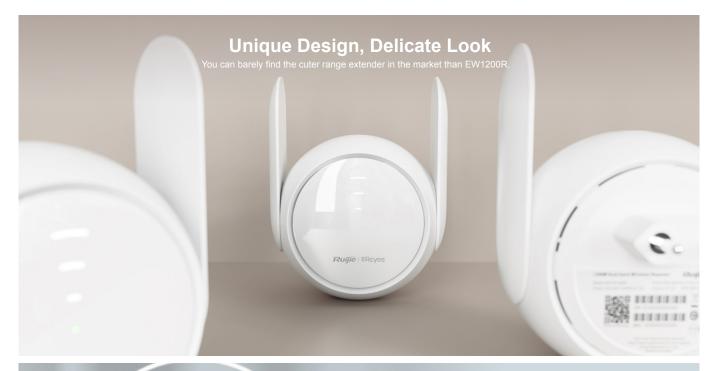



Take Control of Your Home Network at Fingertips

.

Remote Reboot

Rcycc

Set up your home network in Reyee Router App in two minutes. More Life-time Free functions are waiting for you to Explore, Experience, Expect.










Google Play Download on the App Store

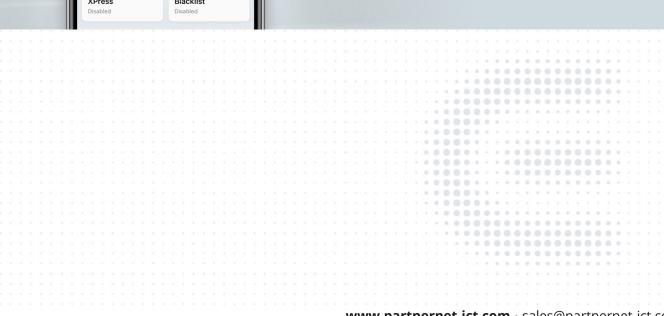





	Basic
Dimensions (W×D×H)	128 mm x 102 mm x 60 mm (5.04 in. × 4.02 in. × 2.36 in. antennas not included)
Weight	0.25 kg (packages not included)
Wi-Fi Standards	Wi-Fi 5 (802.11ac)
MIMO	2.4 GHz, 2×2, MU-MIMO 5 GHz, 2×2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 300 Mbps 5 GHz: 867 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	2
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 4 dBi
Port	1×10/100 Base-T WAN/LAN
Recommended Users	24
Max. Users	96
Power Supply	100-240V~50/60Hz 0.5A
Power Consumption	≤15W
Operation Frequency Bands	802.11b/g/n/: 2.400 GHz to 2.483 GHz 802.11a/n/ac: 5.150 GHz to 5.350 GHz 802.11a/n/ac: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
Transmit Power	Regular: CE EIRP: ≤20dBm (2.4GHz) ≤27dBm (5GHz) ≤20dBm 2400~2483.5MHz(Bluetooth) Myanmar: 2400~2483.5MHz ≤ 20dBm(EIRP) ; 5150~5350MHz ≤ 23dBm(EIRP) ; 5470~5725MHz ≤ 30dBm(EIRP) ;





Basic	
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE,RoHS
Wireless	
OFDMA	-
MU-MIMO	\checkmark
BSS Coloring	-
Maximum Number of SSIDs	6
SSID Hiding	\checkmark
Band Steering	\checkmark
Guest Wi-Fi	\checkmark
WPA/WPA2	\checkmark
WPA3	-
Roaming	Layer 2 Roaming
Blacklist	\checkmark
Reyee Mesh	\checkmark
Mesh Pairing by Hardware	\checkmark
Mesh Pairing by Mesh Button	\checkmark
Mesh Pairing by Eweb	\checkmark
Recommended Hop Count	≤2
Wi-Fi Optimization	\checkmark
QoS (WMM)	\checkmark
WPS	\checkmark
Transmission Power Adjustment	\checkmark





Hardware	
CPU	MT7628DAN
Flash	16 MB
RAM/SDRAM	64 MB
Color	White
System LED Indicator	\checkmark
Reyee Mesh LED Indicator	\checkmark
Reyee Mesh Button	\checkmark
Power Button	-
Reset Button	\checkmark
DC Connector Dimensions	-
	WAN
Static IP	\checkmark
DHCP	\checkmark
PPPoE	\checkmark
Learning PPPoE Account & Password	\checkmark
VLAN Tagging	\checkmark
LAN	
DHCP Server	\checkmark
Client List	\checkmark
Static IP Assignment	\checkmark
Port-Based Flow Control	\checkmark
Features	
IPv6	





Features	
DDNS	-
IPTV	-
Alarm	-
Diagnosis	-
UPnP	-
ARP Binding	-
Port Mapping	-
DMZ Host	-
Rate Limitation of Terminals	-
Hardware Acceleration	-
MAC Address Cloning	\checkmark
Cloud Management	\checkmark
Repeater Mode	\checkmark
WISP Mode	\checkmark
Security	
PPTP VPN Server	-
PPTP VPN Client	-
L2TP VPN Client	-
Parental Control	-
Protect TCP Flood Attacks	\checkmark

Protect ICMP Attacks

Protect UDP Flood Attacks

-





System	
Default Access/Password	10.44.77.254 No Password Required by Default
URL Access	-
Local Upgrade	\checkmark
Online Upgrade	\checkmark
APP Upgrade	\checkmark
Syslog	-
Backup	-
Factory Reset	\checkmark
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

Package Contents

Model	RG-EW1200R
Wireless Extender	1
User Manual	1
Warranty card	1

Rujje

Redefine your easy network





sales@partnernet-ict.com | +30 210 710 0000 | www.partnernet-ict.com