

RG-RAP2260(H)

Wi-Fi 6 AX6000 High-density Multi-G Ceiling Access Point

DATASHEET



Highlights

- Build ultra-high performance Wi-Fi with 5.95Gbps throughput.
- Client connections over 500, higher practical performance as well.
- Boost Internet speed with 5Gbps uplink for the future.
- Easily install extra AP with Reyee Mesh technology.
- Support standalone captive portal, easy to enable Wi-Fi authentication.

Build Ultra-fast Wi-Fi Network for the Future

Interface

Installation



WiFi 6 AX6000
Wi-Fi 6

4x4 MIMO 4 x 4
MU-MIMO



Dual 2.5GE
Wired Uplink



Reyee Mesh
Technology



Free Cloud
Management

Build Ultra-fast Wi-Fi Network for the Future

Interface

Installation



WiFi 6 AX6000
Wi-Fi 6

4x4 MIMO 4 x 4
MU-MIMO



Dual 2.5GE
Wired Uplink




Reyee Mesh
Technology



Free Cloud
Management


Better Multi-User Experience in High-Density Scenarios

Performance upgraded, support client connections over 500.

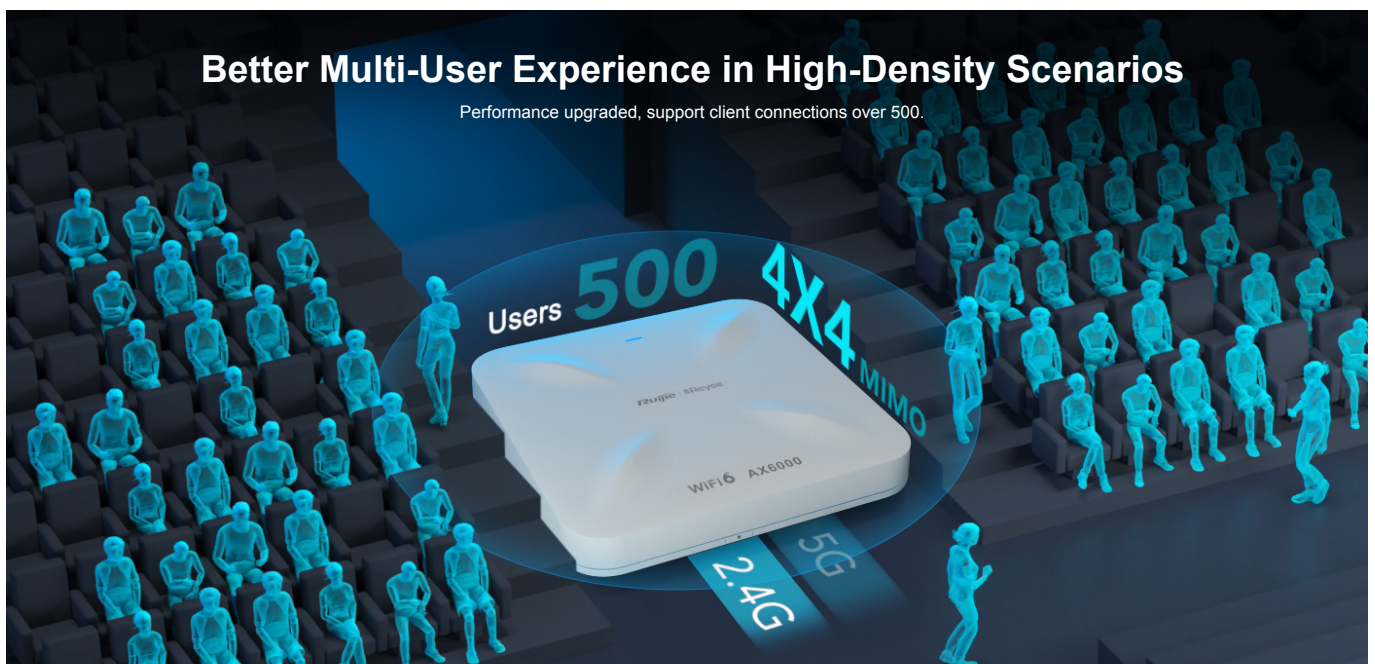


Boost Your Internet Speed with 5Gbps Uplink

Can be integrated dual 2.5GE uplink, build network for future.

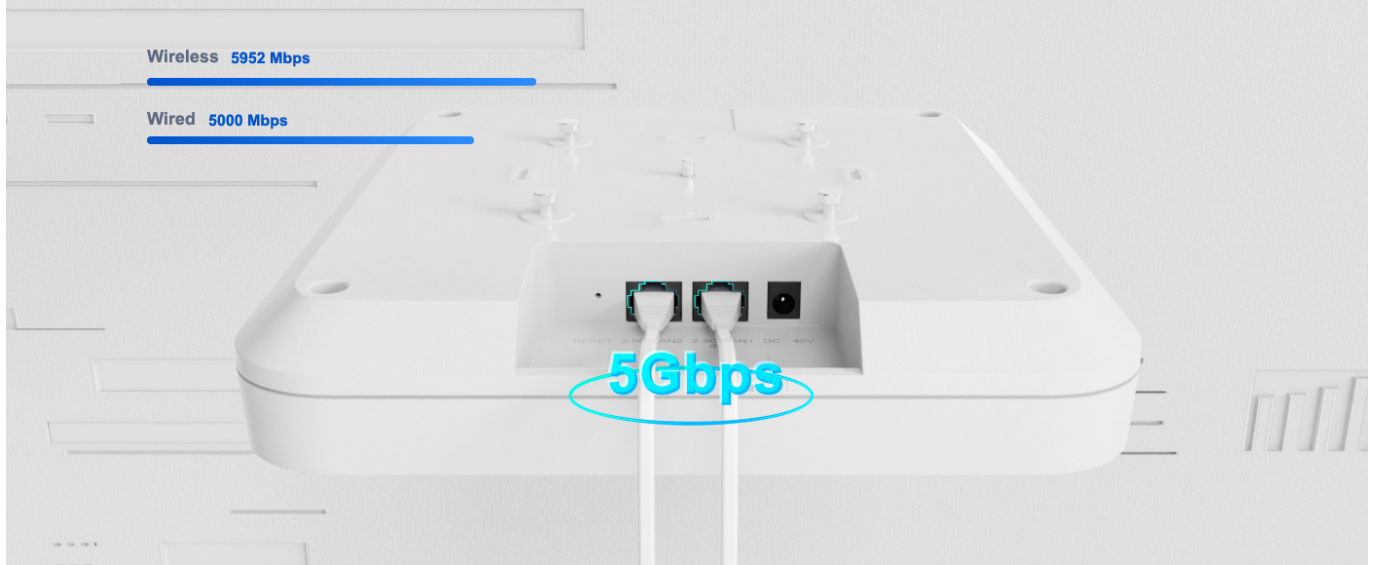

Easily Install Extra AP with Reye Mesh


Less wiring, more relaxing.

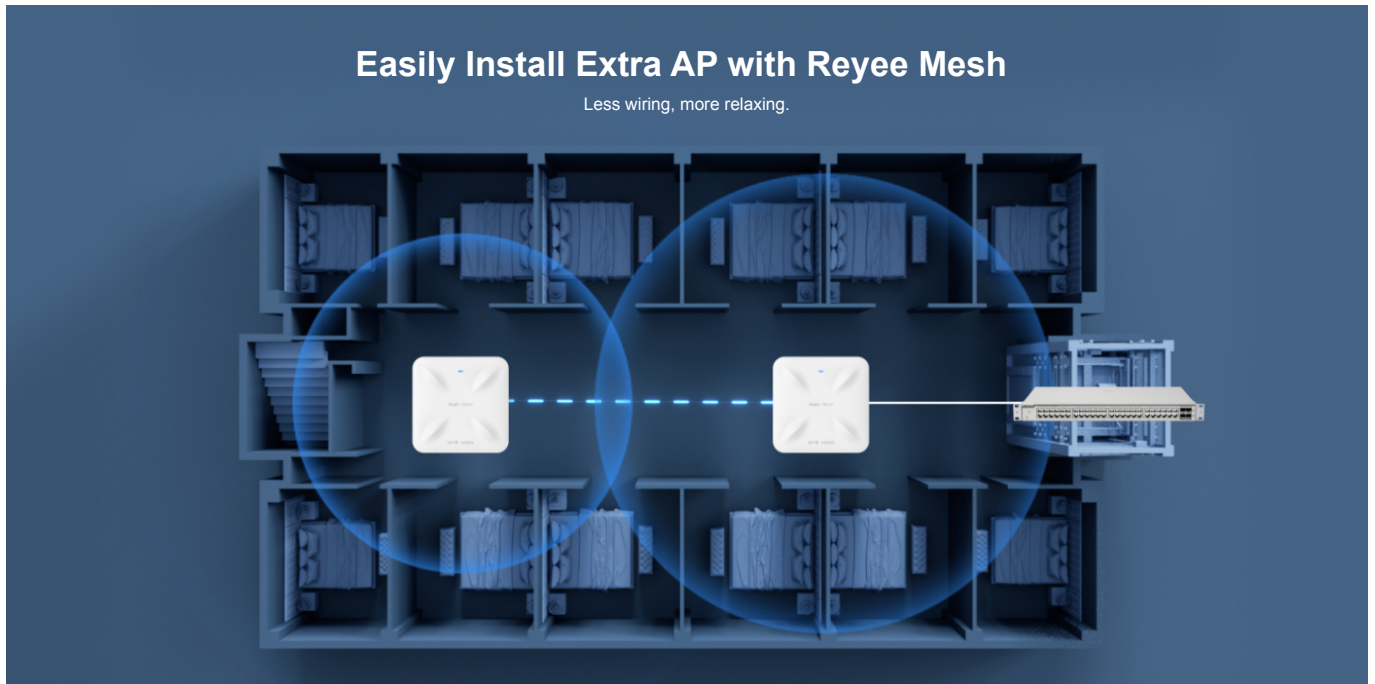



Cloud, Make Your Business Easy

- Self-organizing network
- Centralized network management
- Scenario based configuration
- Cloud portal authentication
- Remote monitoring and maintenance

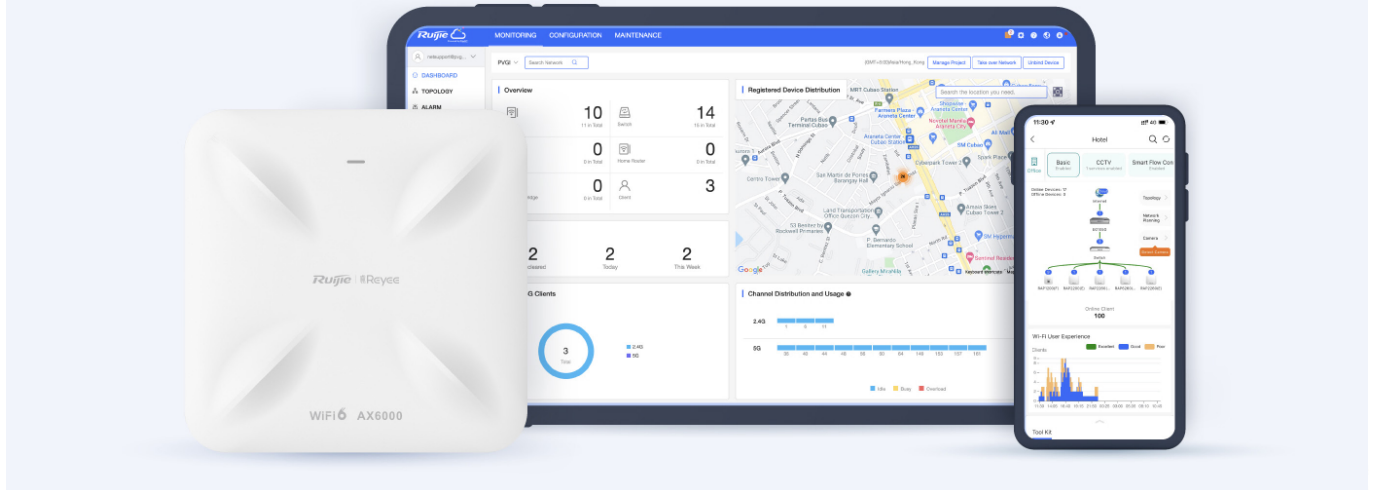

Basic Feature

Wi-Fi Standards	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave 2) Wi-Fi 4 (IEEE 802.11n) IEEE 802.11a IEEE 802.11b/g
MIMO	2.4GHz, 4x4, MU-MIMO 5GHz, 4x4, MU-MIMO
Max. Wi-Fi Speed	2.4GHz: 1148Mbps 5GHz: 4804Mbps
Antenna	8
Antenna Type	Built-In Omnidirectional
Antenna Gain	2.4GHz: 3dBi 5 GHz: 4dBi
Transmit Power	EIRP: ≤35dBm (2.4GHz) ≤36dBm (5GHz) country-specific restrictions apply Thailand: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5725 MHz ≤ 25 dBm 5725 MHz~5850 MHz ≤ 30 dBm
Fixed Ports	2 x 100/1000/2500 Base-T ports 1 × Reset button 1 x DC port
Max. Clients	512
Recommended Clients	130
Max. SSIDs	8
Recommended Wi-Fi Coverage Radius	2.4GHz: 40 meters 5GHz: 70 meters The Wi-Fi coverage is related to the installation environment of the access point.
Max. Wi-Fi Coverage Radius	150 meters

Basic Feature

Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.4835 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
---------------------------	--

Software Feature

WLAN Basic Features

Power Adjustment	✓
------------------	---

Frequency Bandwidth	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80/160 MHz
---------------------	---

Roaming	Layer 2 roaming Layer 3 roaming
---------	------------------------------------

OFDMA	✓
-------	---

Beamforming	✓
-------------	---

WMM	✓
-----	---

Radar Signal Detection and Frequency Hopping (DFS)	✓
--	---

WLAN Security

Max Wi-Fi Password Length	16 Digits
---------------------------	-----------

Security Mode	WPA-PSK, WPA2-PSK, WPA/WPA2-PSK
---------------	---------------------------------

Blacklist and Whitelist	✓
-------------------------	---

Enhanced User Experience

Wi-Fi Optimization	✓
--------------------	---

STA Limit	✓
-----------	---

Removing Low-RSSI STAs	✓
------------------------	---

Adjusting Sending Rate of Beacon and Probe Response	✓
---	---

Software Feature	
Syslog Recording Why Users Lose Connection	✓
Auto Channel and Power Adjustment on Cloud	✓
RSSI Threshold for STA Access	✓
Load Balancing	✓
Networks	
Network Access Mode	PPPoE Client DHCP Client Static IP
VLAN	✓
DHCP Server	✓
System	
Cloud Management	✓
APP Management	✓
APP Upgrade	✓
APP Restart	✓
Scheduled Restart	✓
Default Access/Password	10.44.77.253 No Password Required by Default
Local Upgrade	✓
Online Upgrade	✓
Dual-bin Backup	✓
Factory Reset	✓
Language	Chinese English

System

System Log	✓
Diagnostics	✓
Network Check	✓

Physical

LED Indicator	1 × System LED indicator
---------------	--------------------------

Buttons	1 × Reset button
---------	------------------

Dimensions (W × D × H)	230 mm x 230 mm x 49.5 mm (Without Mounting Bracket)
------------------------	--

Weight	≤ 1.80 kg (Without Mounting Bracket)
--------	--------------------------------------

DC Port Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm
--------------------	---

Installation	Ceiling-Mountable
--------------	-------------------

Mounting Bracket Dimensions (W × D × H)	120 mm x 120 mm x 8.7 mm
---	--------------------------

Mounting Hole Pattern	53 mm x 53 mm
-----------------------	---------------

Mounting Hole Diameter	6.5 mm
------------------------	--------

Pole Diameter	NA
---------------	----

Power Supplies	IEEE 802.3bt PoE DC 48V/1A
----------------	-------------------------------

Power Consumption	≤ 40W
-------------------	-------

PoE Power Budget	NA
------------------	----

Environmental

Operating Temperature	0°C to 40°C
-----------------------	-------------

Storage Temperature	-40°C to 70°C
---------------------	---------------

Operating Humidity	5% to 95% Noncondensing
--------------------	-------------------------

Physical

Storage Humidity 5% to 95% Noncondensing




IP(Ingress Protection) NA

Port Surge 4kV




MTBF >400000H

Antenna Schematic

2.4GHz

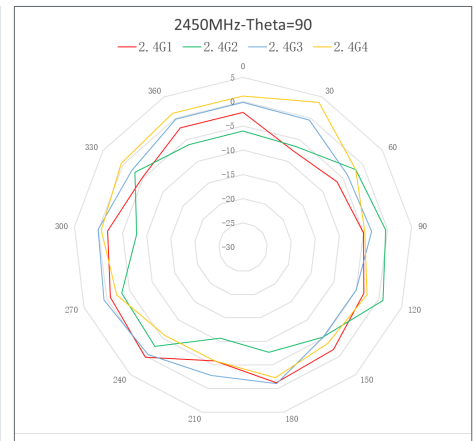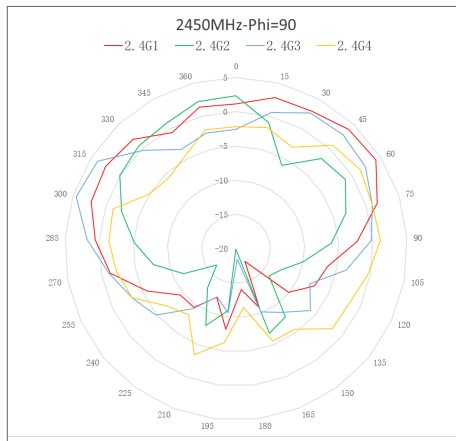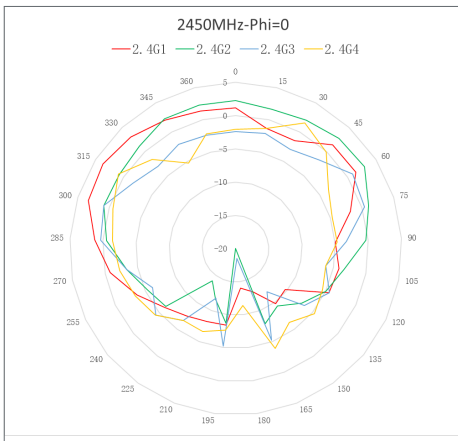

5GHz

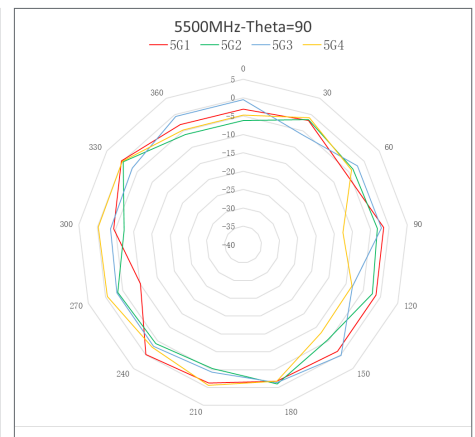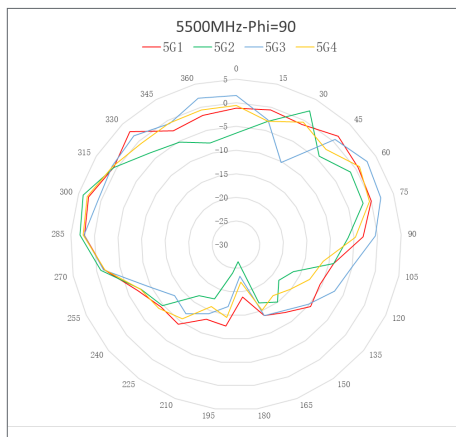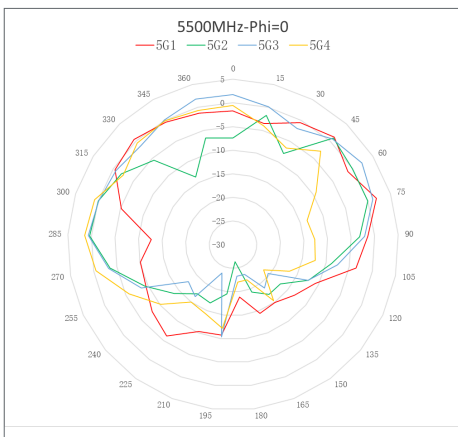

Package Contents

Package Information	RG-RAP2260(H)
Access Point	1
User Manual	1
Certificate of Quality	1
Screws and Wall Anchors	4
Mounting Bracket	1
Key to Security Lock	1
Package Weight	1.79 kg
Package Dimension (w x d x h)	292mm x 277 mm x 81 mm

Ruijie | Rcycc

 **Redefine your easy network**



FOLLOW US



sales@partnernet-ict.com | [+30 210 710 0000](tel:+30210710000) | www.partnernet-ict.com

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.