

Product Introduction

This rotary dimmer panel features a premium glass surface and a metal knob, delivering a sophisticated design. The panel easily switches dimming modes through a dip switch, compatible with various types of lighting devices, offering a user-friendly and efficient lighting control solution.

Features

- 256 levels of smooth 0-100% dimming, flicker-free
- Adjustable brightness with a rotating knob, supporting both short and long presses
- Dip switch for selecting leading-edge or trailing-edge dimming
- 3-second on/off fade
- Built-in overheat and overload protection with automatic recovery




Specification


- Product Model: TS-K(WZ)
- Input Voltage: AC100 ~ 240V
- Output Voltage: AC100 ~ 240V
- Input Current: 1.5A
- Output Current: 1.5A
- Output Power: 150 ~ 360W
- Working Temperature: -10 ~ 40°C
- Working Humidity: 0 ~ 95% RH (non-condensing)
- Product Dimensions: 43×39.2×22.3mm
- Protection Level: IP20

Wiring Diagram

- Connect with dimmable LED light

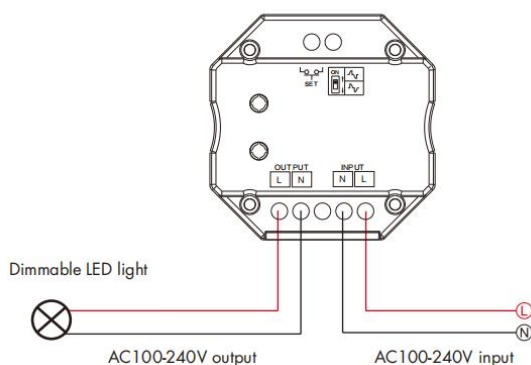

- Connect with Triac dimmable LED driver

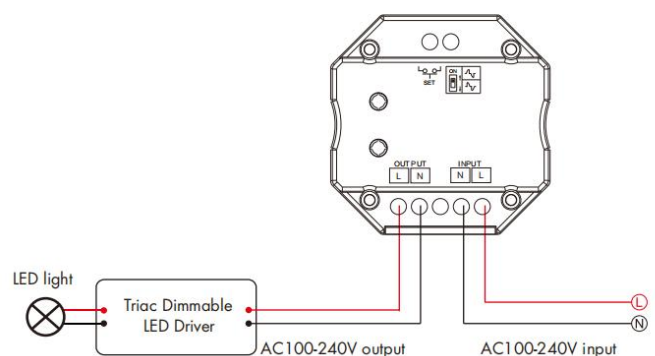

Networking method

1. Connect the wires according to the wiring diagram and power on the device.
2. Short press the reset button twice quickly; the device indicator will flash rapidly, indicating that it is in the pairing mode.
3. Add to the network through the gateway device.

Product Dimension Diagram (mm)

